


# MI

COMPONENT SPEAKERS


## ML 653C

### Installation Instructions

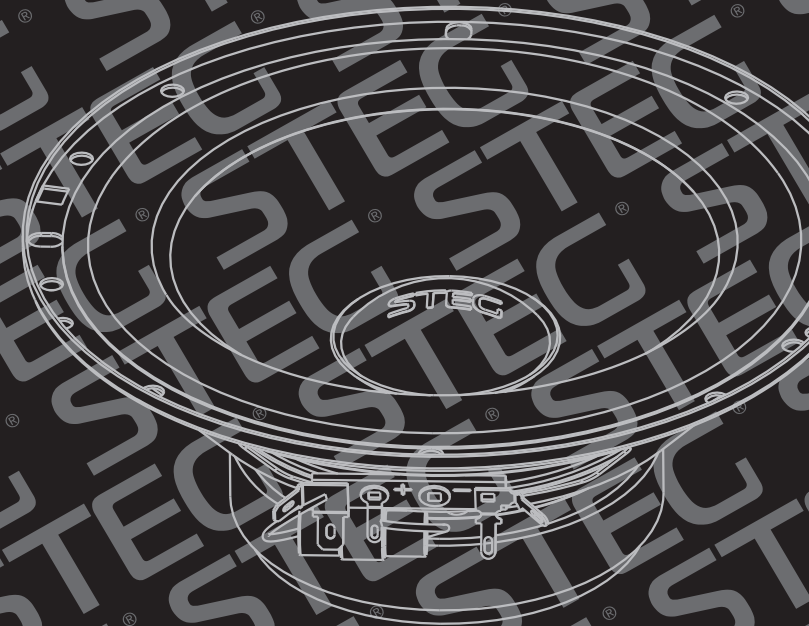


- 感谢您的阅读
- Thanks for your review


### 高音安装尺寸:

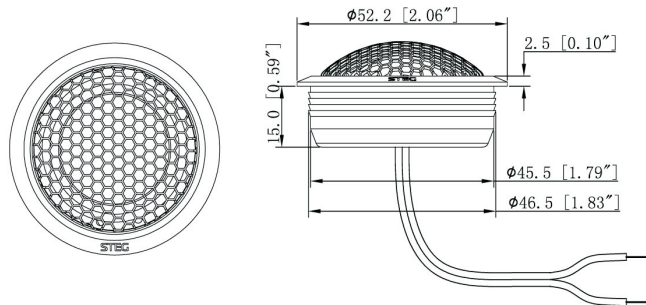

### 中音安装尺寸:

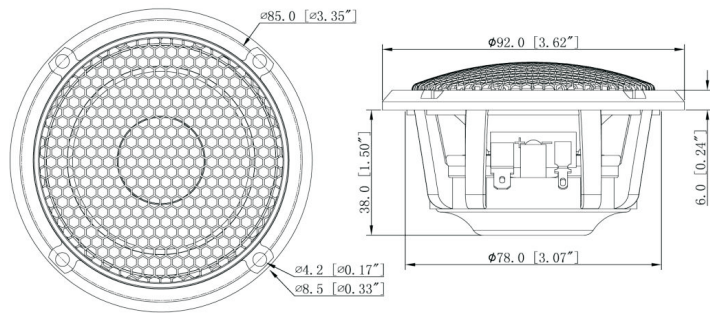

### 低音安装尺寸:

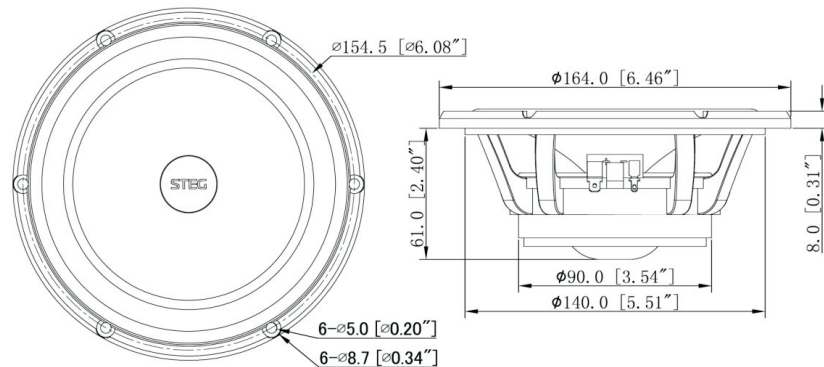

### 高音技术参数:

膜片材质: 特多龙  
 音圈尺寸: 25mm  
 直流阻抗:  $3.6 \Omega$   
 持续功率: 20 W  
 频率响应: 1300-22000Hz  
 灵敏度: 90 dB  
 重量: 92g  
 安装深度: 17 mm  
 安装直径: 47 mm

### 低音技术参数:


鼓纸材质: 复合音盆  
 音圈尺寸: 25.5mm  
 持续功率: 60 W  
 频率响应: 65-6.5KHz  
 直流阻抗:  $3.0 \Omega$   
 Fo: 65Hz  
 SPL: 88 dB  
 Sd:  $128.6 \text{ cm}^2$   
 Bl: 4.3Tm

### 中音技术参数:


鼓纸材质: 复合音盆  
 音圈尺寸: 25mm  
 直流阻抗:  $3.6 \Omega$   
 持续功率: 30W  
 频率响应: 100-15000Hz  
 SPL: 85 dB  
 Qms: 3.78  
 Qes: 1.13  
 Qts: 0.87  
 Vas: 1.61Ltr  
 有效振动质量: 4.3g  
 重量: 0.225kg  
 安装深度: 41 mm  
 安装直径: 79 mm

Qms: 4.43  
 Qes: 0.87  
 Qts: 0.72  
 No: 0.336%  
 Vas: 11Ltr  
 Cms:  $474.3 \mu\text{M/N}$   
 Mms: 12.8g  
 Mmd: 11.9g  
 重量: 0.91kg  
 安装深度: 64 mm  
 安装直径: 142 mm


**成品连接图：**

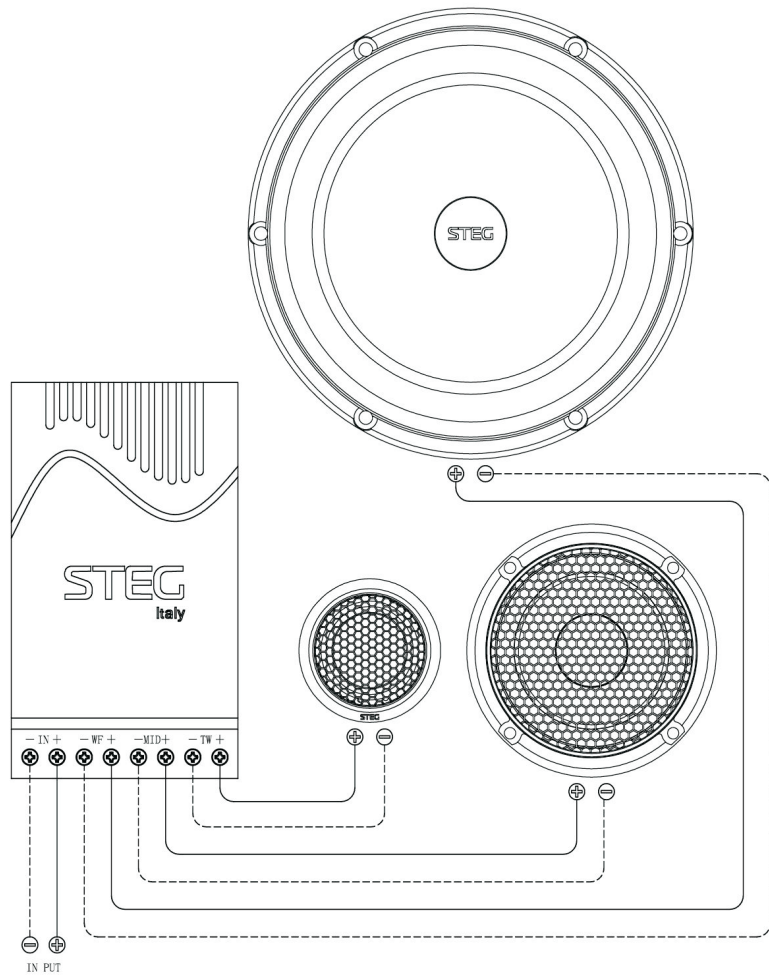


**Tweeter installation size:**

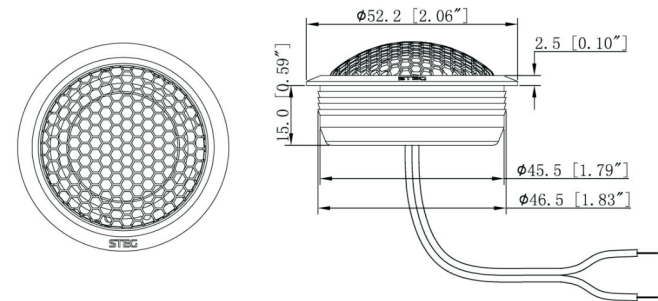

**Midrange installation size:**

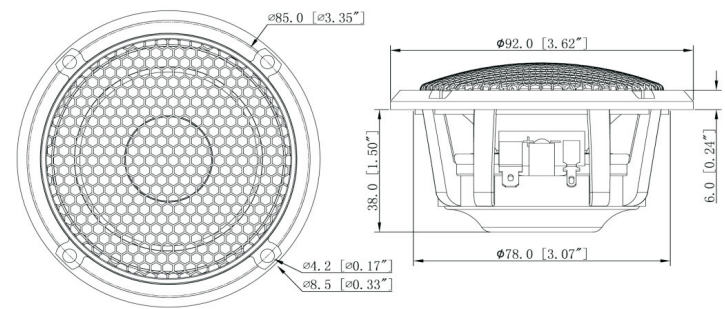

**Woofer installation size:**

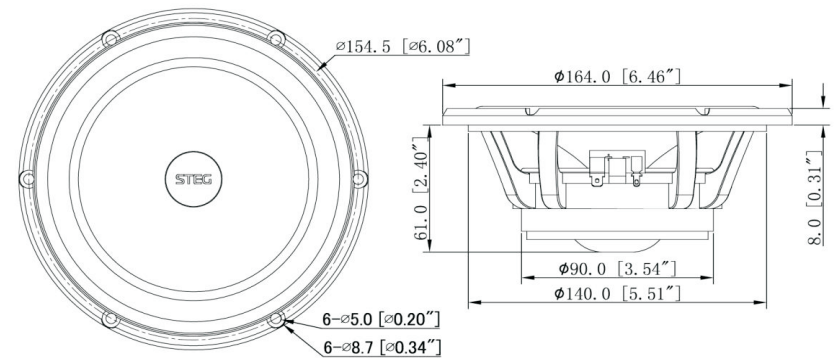

### Tweeter technical parameter

Cone material: Tetonon  
Voice coil size: 25mm  
DC Impedance: 3.6  $\Omega$   
Rated power input: 20 W  
Frequency response: 1300-22000Hz  
SPL: 90 dB  
Weight: 92g  
Mounting Depth: 17 mm  
Mounting Diameter: 47 mm

### Midrange technical parameter

Cone material: Composite coner  
Voice coil size: 25mm  
DC Impedance: 3.6 $\Omega$   
Rated power input: 30W  
Frequency response: 100-15000Hz  
SPL: 85 dB  
Qms: 3.78  
Qes: 1.13  
Qts: 0.87  
Vas: 1.61 Ltr  
Weight: 0.225kg  
Mounting Depth: 41 mm  
Mounting Diameter: 79 mm

### Woofers technical parameter

Cone material: Composite cone  
Voice coil size: 25.5mm  
Rated power input: 60 W  
Frequency response: 65-6.5KHz  
DC Impedance: 3.0  $\Omega$   
Fo: 65Hz  
SPL: 88 dB  
Sd: 128.6 cm<sup>2</sup>  
Bl: 4.3Tm  
Qms: 4.43  
Qes: 0.87  
Qts: 0.72  
No: 0.336%  
Vas: 11 Ltr  
Cms: 474.3 u M/N  
Mms: 12.8 g  
Mmd: 11.9 g  
Weight: 0.91 kg  
Mounting Depth: 64 mm  
Mounting Diameter: 142 mm

### Product connection diagram:

